


NEW PRODUCT

ANTI-TERRORIST RISING BOLLARD

Tested to Stop a 7.5 Tonne Truck Travelling at 50mph/80km/h at 90°

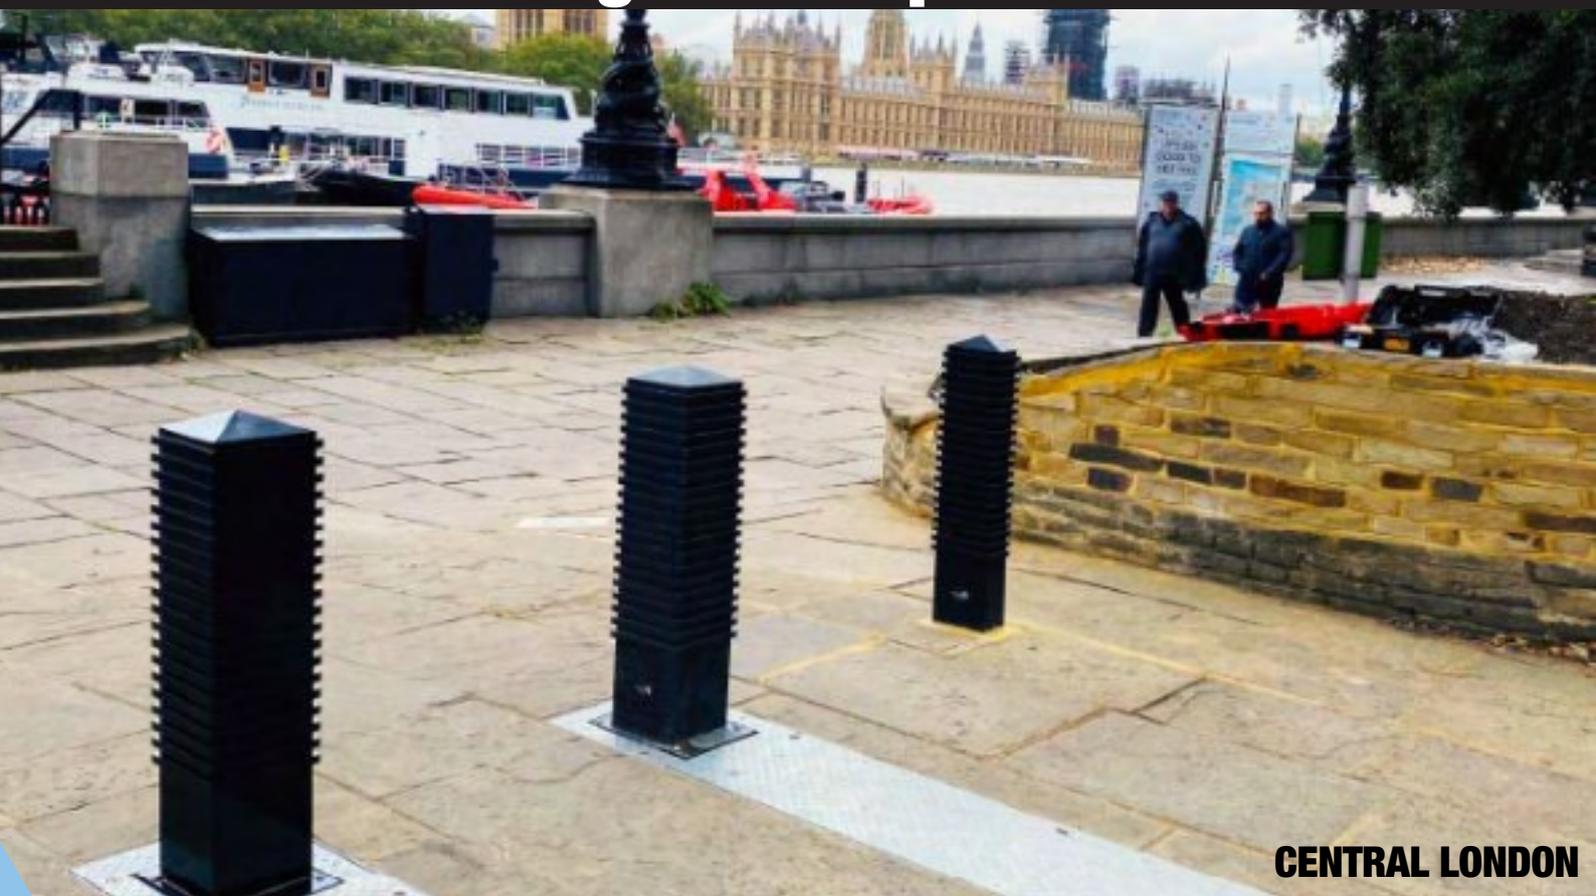

CENTRAL LONDON

CARBON NEUTRAL - OPERATES WITH A 18 VOLT CORDLESS DRILL



Applications

- ▶ Airports
- ▶ Sports Arenas
- ▶ Retail Parks
- ▶ Police Stations
- ▶ Critical Infrastructure
- ▶ Government Buildings
- ▶ Conference Centres

'New slimline single rising bollard. Manually operated with (18V) drill. No mains power required. Shallow footing - only 630mm deep'

SINGLE UNIT INSTALL OR MULTIPLE UNIT


The new technology breakthrough in SHALLOW MOUNT RISING BOLLARD systems - it will keep bollard systems and ground work costs to a fraction of the old, large systems. This new patent granted bollard rising system is designed by our new Micro Engineering Division to cope with today's demand for shallow mount systems in both manual and hydraulic systems.

It requires no mains power as it is powered by a cordless drill. A new shallow rising bollard, it will stop a 7.5 ton truck travelling at 50 mph or 80 km at 90 degrees from breaking through the security line. After impact the bollard still worked. This system will also reduce the need to re-divert utilities. The system is the most economical on the market for both bollard systems and installation. It is also very low maintenance, once fitted as a stand alone single unit and can also be installed on a gradient. After impact if the bollard or any parts in the system are damaged all the parts can be removed from the outer case that is concreted into the foundation and replaced. When fitted with a stainless steel bollard cover it is very aesthetically pleasing.


TRUCKSTOPPER RB003-50 SLIMLINE RISSING BOLLARD PERFORMANCE CLASSIFICATION					
Vehicle Test Weight	Vehicle Class	Vehicle Speed kph	Vehicle Angle	Vehicle Penetration m	Footing Depth mm
IWA14:V/7200	[N2A]	80	90	3.1	630
ASTM	[F2656]	M50	90	P2	630

Super Shallow Manual Rising Bollard ASTM / PAS 68 / IWA 14

ALSO AVAILABLE IN 30MPH/48KPH AND 40MPH/64KPH OPTIONS

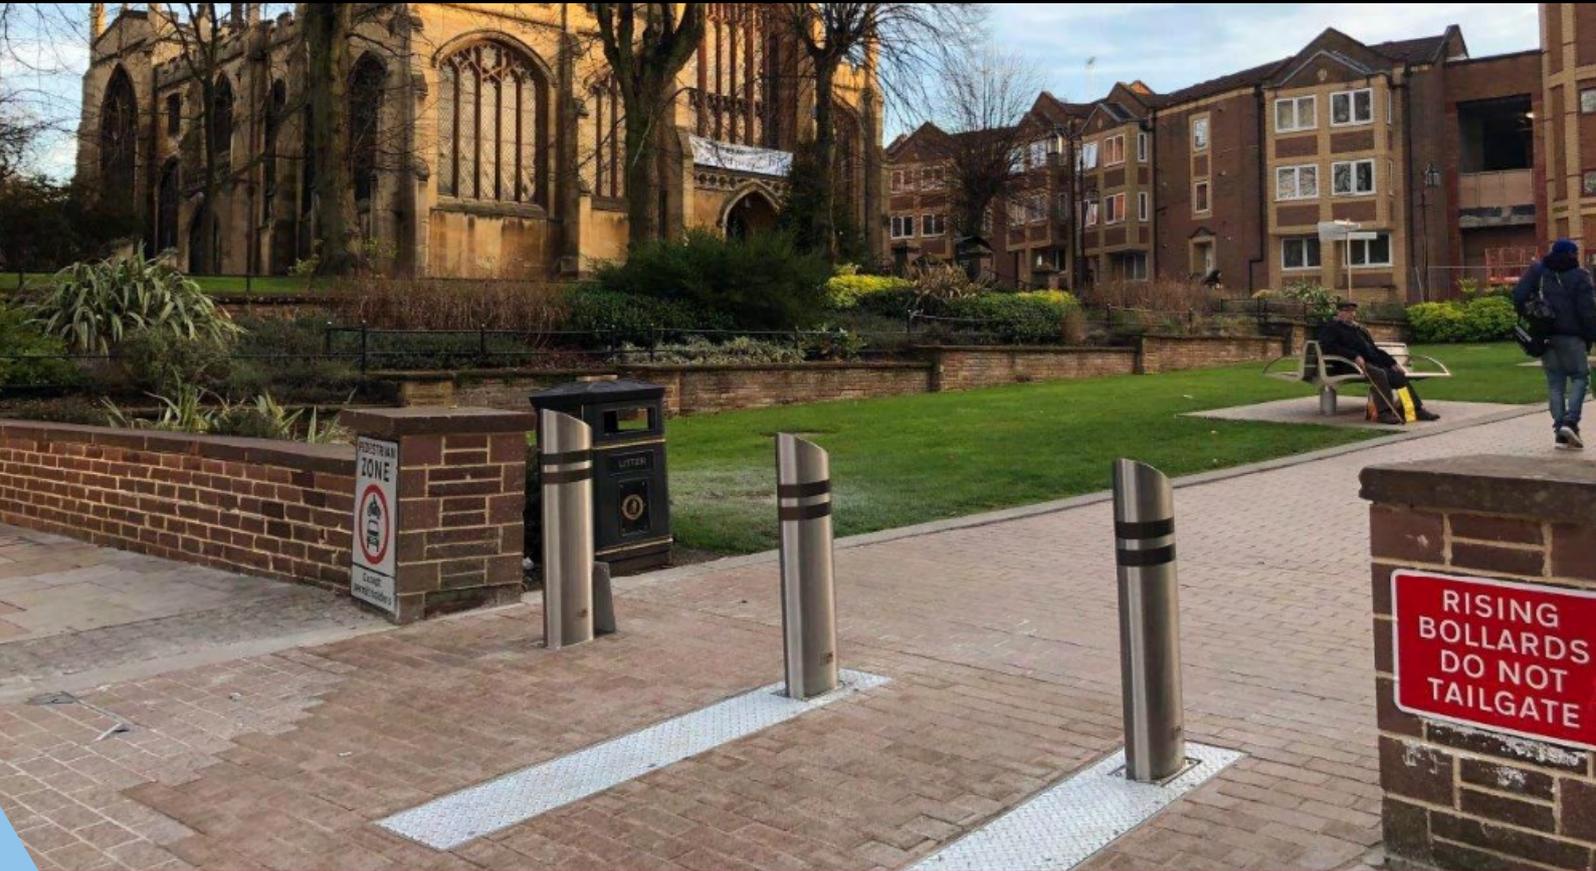

ALL CARBON NEUTRAL - CAN ALSO BE FITTED WITH A SHROUD OF YOUR CHOICE

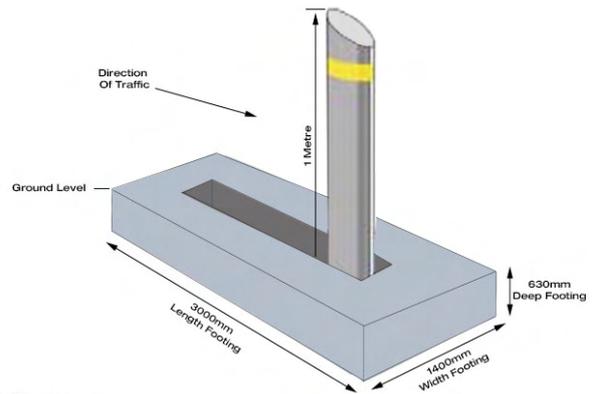

**Patent
Granted**

Height Above Ground: 950mm
 Footing Depth: Only 580mm With 50mm Bedding
 Options: Stainless Steel & Mild Steel Shrouds Available
 Still Working After Impact

safetyflex
 ANTI-TERRORIST BOLLARDS
 BLOCKS • BARRIERS & CRASH FENCES
www.safetyflexbarriers.com

Safetyflex Barriers
 Boston Place, Coventry UK CV6 5NN
UK Sales Tel: +44 (0) 2476 662116



 **email:** info@safetyflexbarriers.com
 **email:** us@safetyflexbarriers.com
 **email:** info@safetyflexbarriers.com